


type number	A (mm)	B (mm)	H (mm)	thickness of metal sheet (mm)	weight (kg/ks)	🔥
NVKO 90X50X62_S	62	400	12	0,55	0,15	🔥
NVKO 90X50X62_F				0,6	0,20	🔥
NVKO 90X50X125_S	125	400	12	0,55	0,26	🔥
NVKO 90X50X125_F				0,8	0,45	🔥
NVKO 90X50X250_S	250	400	12	0,55	0,47	🔥
NVKO 90X50X250_F				0,8	0,81	🔥
NVKO 90X100X125_S	125	479	12	0,55	0,31	🔥
NVKO 90X100X125_F				0,8	0,53	🔥
NVKO 90X100X250_S	250	479	12	0,55	0,57	🔥
NVKO 90X100X250_F				0,8	0,97	🔥
NVKO 90X100X500_S	500	479	15	0,7	1,42	🔥
NVKO 90X100X500_F				0,8	1,91	🔥

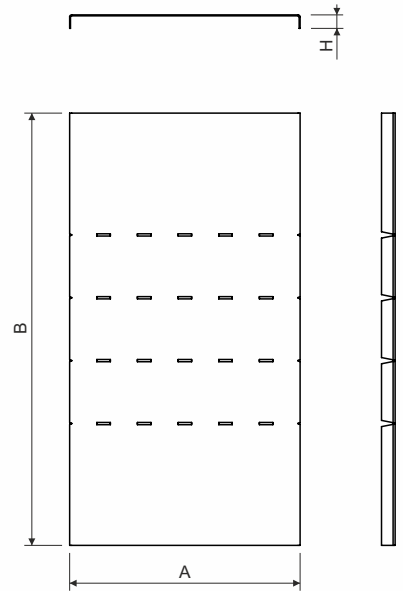

product description: This cover is used to cover the low elbow NKO.
 To fix the cover use 4 pcs of cover fixtures VU..
 The covers are supplied straight. They are constructed from a single piece of sheet metal with pre-cut sidewalls for subsequent bending during installation.
 These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15-27 µm
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount: 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895P 90-R
 DIN 4102-12E 90
 STN 92 0205PS 90
 Fire classification depends on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire
 🔥 products are approved for non-standard constructions

storage: ČSN EN 60721-3-1

